

EDS XML Reader- Java Version 1.00

Operation

This software reads XML data from an OW Server or MeshNet Controller every second, converts it to a comma separated format, displays it to the information window and optionally appends it to a file.

The program reads from one OW Server or MeshNet Controller only. To accept data from multiple OW Servers and MeshNet Controllers, see the 'EDS Post Server' program.

The program operates in one of two modes. It can read up to 3 items from a single device (sensor), or it can read the same item from all the devices on the OW Server or MeshNet Controller. When the "Read 1 tag from multiple devices" is selected, it reads all the "Tag 1" items in the XML file. When the "Read 1 tag..." is not selected it will use the 'EUI' field to determine which device to read data from, then it will use the names in "Tag 1", "Tag 2" and "Tag 3" to get the appropriate data.

If a log file is selected, data will be saved to the file in comma separated format with a header at the beginning. This file may be imported to a spreadsheet.

EDS XML Reader - v1.00

Read and parse XML data from an OW Server or MeshNet Controller

Step 1: Select the reading type using the checkbox

Step 2: Fill in the remaining fields

Read 1 tag from multiple devices (disables Tag 2, Tag 3 and EUI)

URL

Tag 1

Tag 2

Tag 3

EUI


Log File

Select Log File Units Metric Begin Quit

Reading 1 Tag From Multiple Devices

To read 1 tag from multiple devices follow these steps. Refer to the screen shot below.

- Enable 'Read 1 tag from multiple devices'.
- Set the URL to the correct location.
- Enter the desired XML tag name to read in 'Tag 1'.
- Click 'Select Log File' and enter a filename and location so the data will be saved.
- Select the units, Metric or English. The program currently converts temperature and barometric pressure.
- Click 'Begin'.

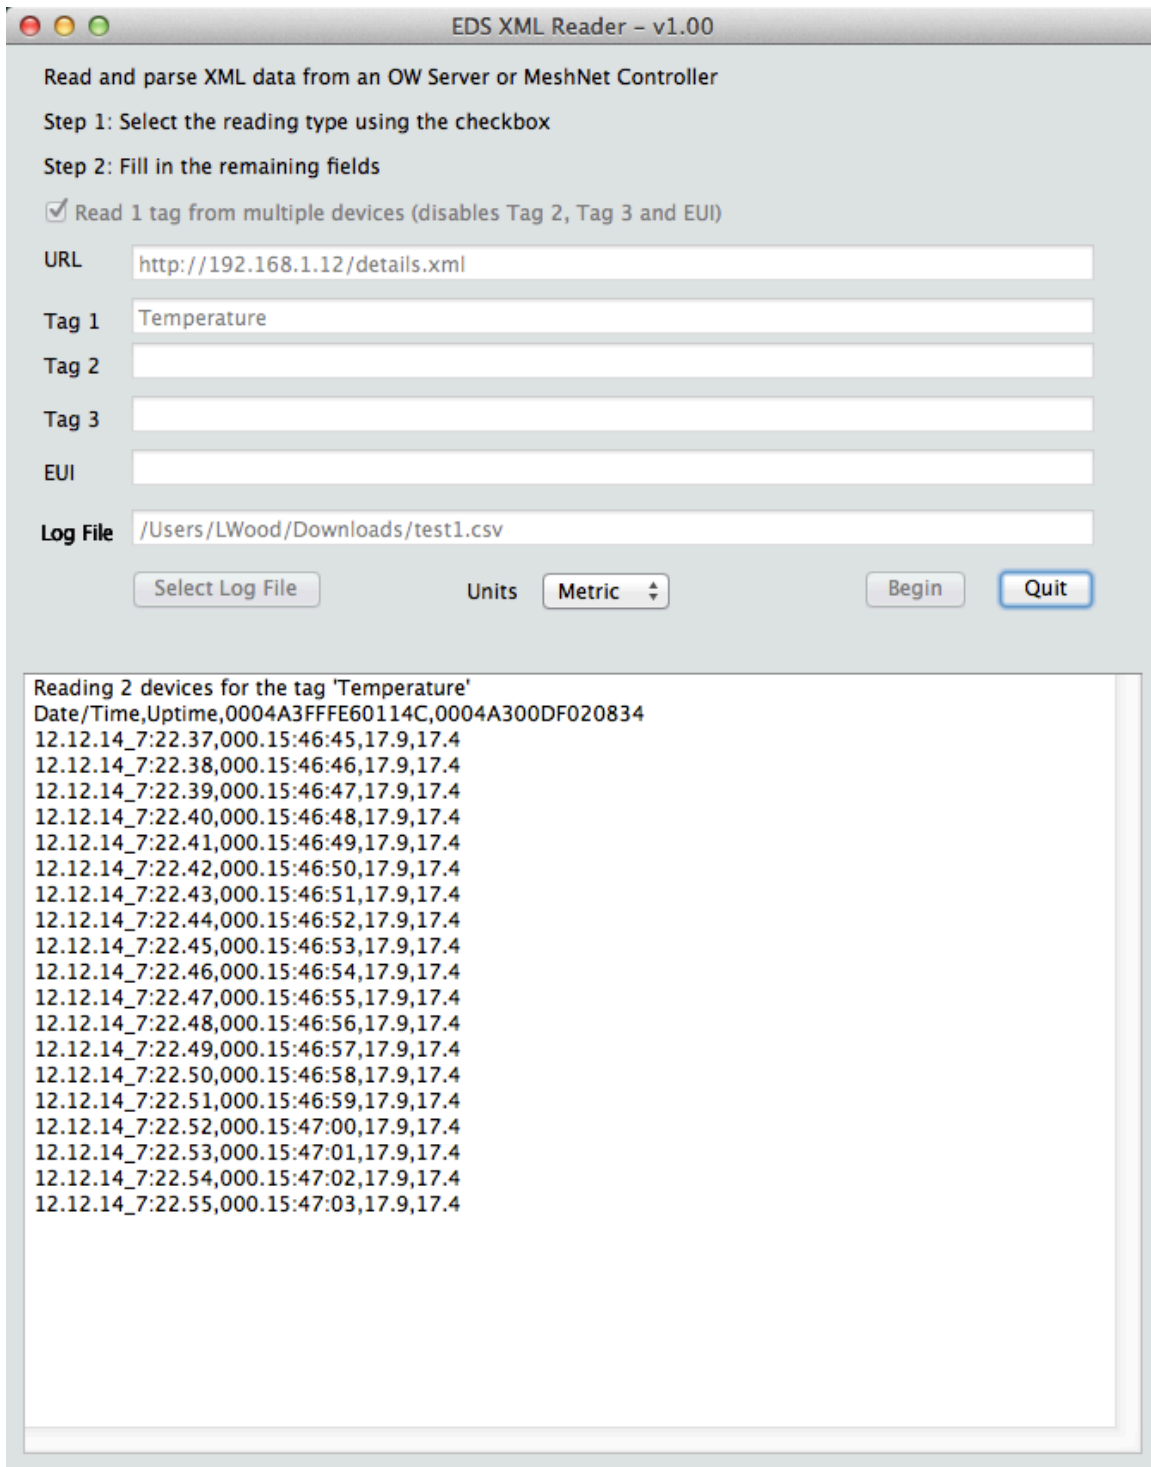


Reading Multiple Tags From One Device

To read up to 3 tags from 1 sensor, follow these steps.

- Disable 'Read 1 tag from multiple devices'.
- Select the correct URL.
- Enter the XML tag names in the fields 'Tag 1', 'Tag 2' and 'Tag 3'. If only 2 tags are to be read, leave 'Tag 3' empty. If only 1 tag is to be read, leave 'Tag 2' and 'Tag 3' empty.

- Enter the EUI or ROMID of the device to read in the 'EUI' field.
- Click 'Select Log File' to write the data to a file.
- Select the desired units, Metric or English.
- Click 'Begin'

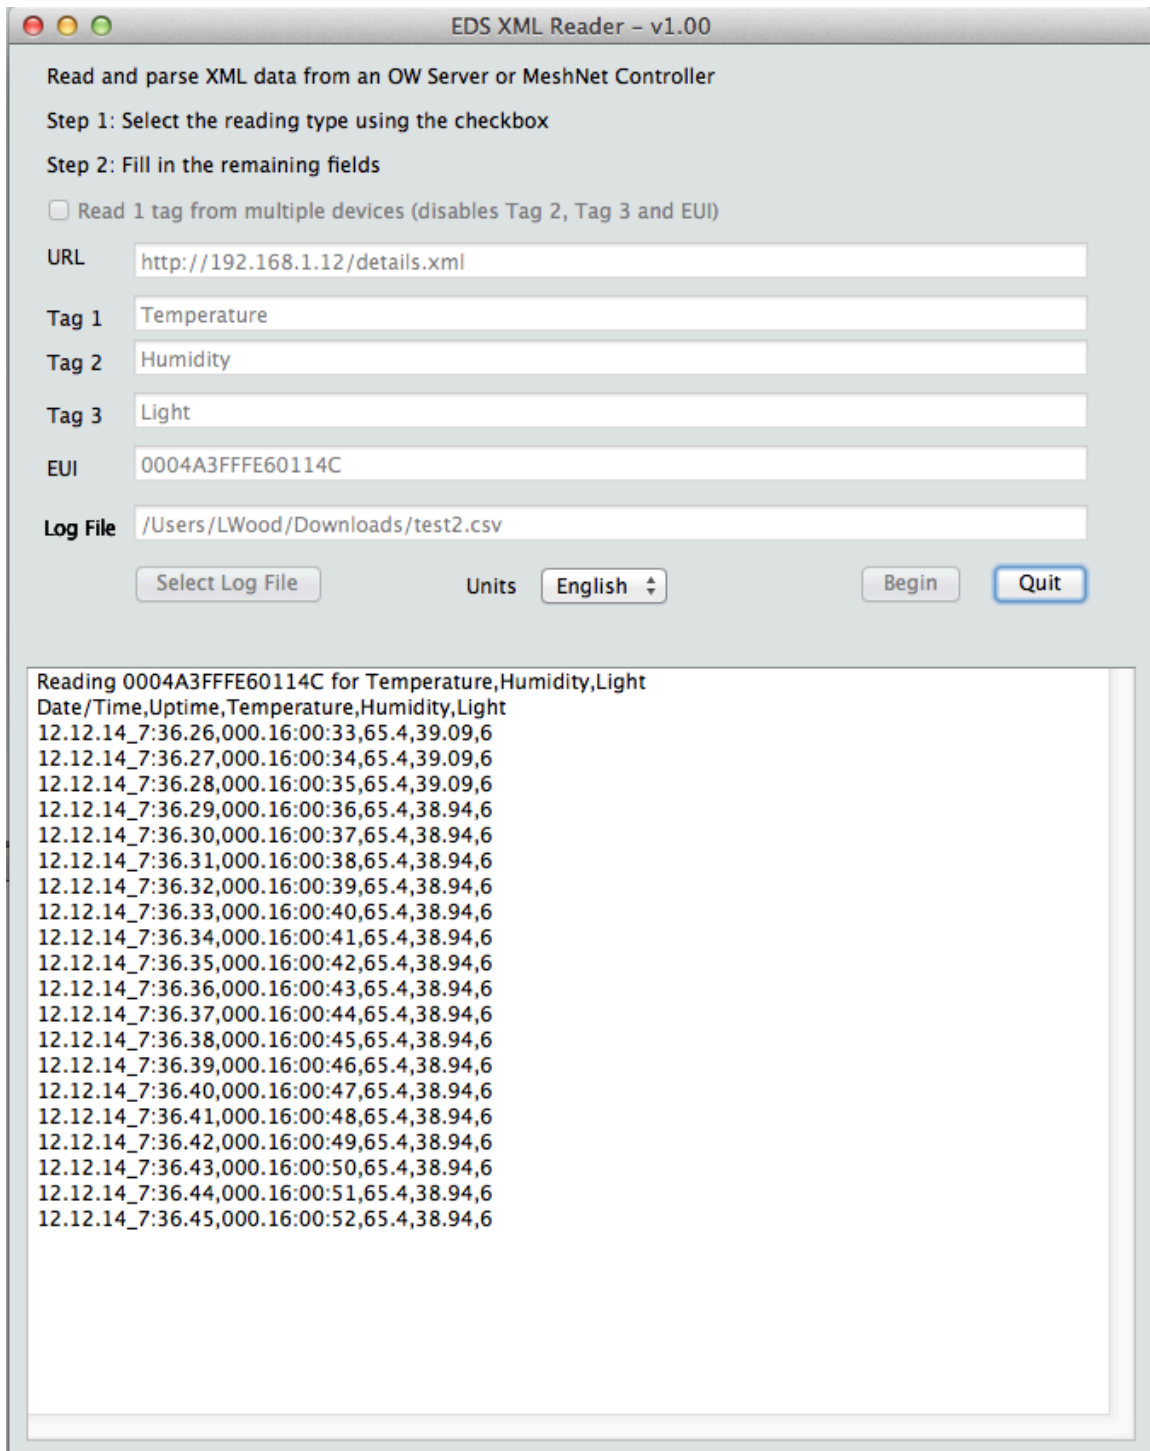


Below is an example of the log file.

```
test2.csv
Reading 0004A3FFFE60114C for Temperature, Humidity, Light
Date/Time, Uptime, Temperature, Humidity, Light
12.12.14_7:36.26, 000.16:00:33, 65.4, 39.09, 6
12.12.14_7:36.27, 000.16:00:34, 65.4, 39.09, 6
12.12.14_7:36.28, 000.16:00:35, 65.4, 39.09, 6
12.12.14_7:36.29, 000.16:00:36, 65.4, 38.94, 6
12.12.14_7:36.30, 000.16:00:37, 65.4, 38.94, 6
12.12.14_7:36.31, 000.16:00:38, 65.4, 38.94, 6
12.12.14_7:36.32, 000.16:00:39, 65.4, 38.94, 6
12.12.14_7:36.33, 000.16:00:40, 65.4, 38.94, 6
12.12.14_7:36.34, 000.16:00:41, 65.4, 38.94, 6
12.12.14_7:36.35, 000.16:00:42, 65.4, 38.94, 6
12.12.14_7:36.36, 000.16:00:43, 65.4, 38.94, 6
12.12.14_7:36.37, 000.16:00:44, 65.4, 38.94, 6
12.12.14_7:36.38, 000.16:00:45, 65.4, 38.94, 6
12.12.14_7:36.39, 000.16:00:46, 65.4, 38.94, 6
12.12.14_7:36.40, 000.16:00:47, 65.4, 38.94, 6
12.12.14_7:36.41, 000.16:00:48, 65.4, 38.94, 6
12.12.14_7:36.42, 000.16:00:49, 65.4, 38.94, 6
12.12.14_7:36.43, 000.16:00:50, 65.4, 38.94, 6
12.12.14_7:36.44, 000.16:00:51, 65.4, 38.94, 6
12.12.14_7:36.45, 000.16:00:52, 65.4, 38.94, 6
12.12.14_7:36.46, 000.16:00:53, 65.4, 38.94, 6
12.12.14_7:36.47, 000.16:00:54, 65.4, 38.78, 6
12.12.14_7:36.48, 000.16:00:55, 65.4, 38.78, 6
12.12.14_7:36.49, 000.16:00:56, 65.4, 38.78, 6
12.12.14_7:36.50, 000.16:00:57, 65.4, 39.39, 6
12.12.14_7:36.51, 000.16:00:58, 65.4, 39.39, 6
12.12.14_7:36.52, 000.16:00:59, 65.4, 39.39, 6
12.12.14_7:36.53, 000.16:01:00, 65.4, 39.39, 6
```

How To Determine XML Names

Variable names can be determined by viewing the XML file. On the main webpage of an OW Server or MeshNet Controller, select the Advanced menu, then Details.

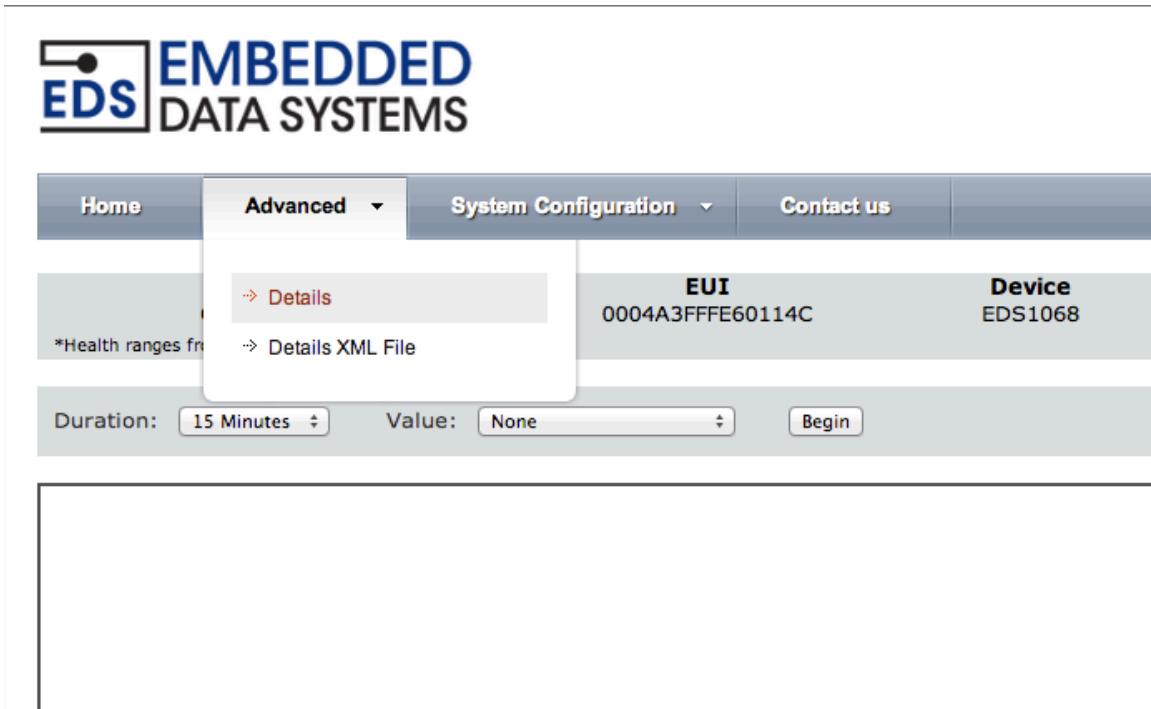

The screen shot below shows part of the XML data. Any line with a “Write” button on the right can be written. For example, the first item that can be written in the XML data below is “UserName”, and it is this text string that would be used as the ‘Tag’ name.

Firmware Version: 1.13
Devices connected: 1
Date / Time: 2012-12-13 15:54:26
Up Time: 000.00:18:44
Device Name: WirelessController-Enet
Host Name: EDSWIRELESSCTRL
MAC Address: 00:04:A3:7A:DF:1A
Connection status: OK

Data activity
 Enable auto update

Name	EDS1068	
Description	Temperature, Humidity, Barometric Pressure and Light Sensor	
EUI	0004A3FFFE60114C	
ControllerRSSI	-34	
Address	1	
Repeater	0	
Health	7	
PrimaryValue	37.17 %RH	
UserName	Car - Shaded	Write
Temperature	23.0625	
Humidity	37.17	
DewPoint	7.6250	
Humidex	23.3125	
HeatIndex	24.1875	
BarometricPressure	995.310	
Light	11	
Battery	3.55	
LED	0	
Relay	0	
Input1	0	
ActivityLatch1	0	
PulseCounter1	0	
ActivityLatchReset	-	Write
ReadCounter	300	
ConnectionCounter	1	
MessageAttempts	300	
MessagePacketRetries	6	
MessageFailures	0	
ResetMessageCounters	-	Write
DeviceRSSI	-40	
TemperatureHighAlarmState	0	
TemperatureLowAlarmState	0	
HumidityHighAlarmState	0	
HumidityLowAlarmState	0	
DewPointHighAlarmState	0	
DewPointLowAlarmState	0	
HumidexHighAlarmState	0	
HumidexLowAlarmState	0	
HeatIndexHighAlarmState	0	
HeatIndexLowAlarmState	0	
BarometricPressureHighAlarmState	0	
BarometricPressureLowAlarmState	0	
LightHighAlarmState	0	
LightLowAlarmState	0	
BatteryLowAlarmState	0	
ClearAlarms	-	Write
TemperatureHighAlarmValue	93	Write
TemperatureLowAlarmValue	-40	Write
HumidityHighAlarmValue	96	Write
HumidityLowAlarmValue	0	Write
DewPointHighAlarmValue	104	Write
DewPointLowAlarmValue	-40	Write
HumidexHighAlarmValue	125	Write
HumidexLowAlarmValue	-40	Write
HeatIndexHighAlarmValue	125	Write
HeatIndexLowAlarmValue	-40	Write
BarometricPressureHighAlarmValue	2000.000	Write
BarometricPressureLowAlarmValue	0.000	Write

Software License

The EDS XML Reader software and source code license is shown below.

Copyright 2012 Embedded Data Systems, LLC

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License.